


XCS Series Data Sheet

PN: 602346099, Model: C6-S7-3070-XCS-50-24-85-SX-1G-405-3R

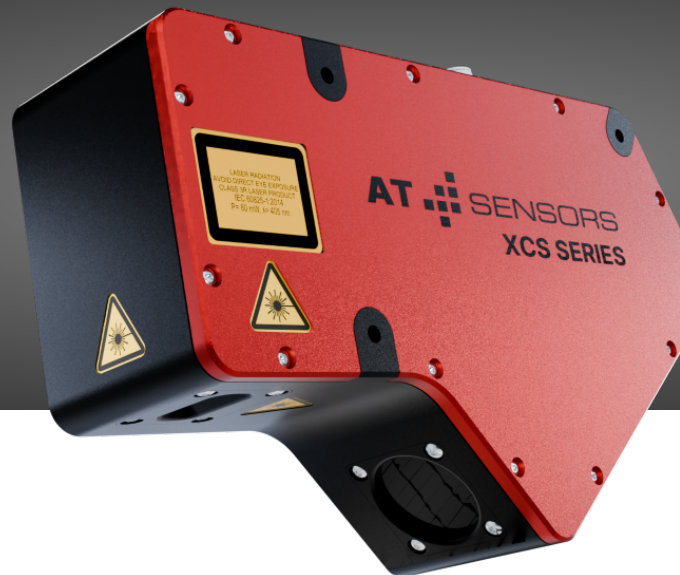

The new 3D sensors of the XCS series are particularly suitable for high-performance applications in the electronics industry thanks to their enormous precision and extreme speed. The sensors are characterized by an optimized laser with homogeneous thickness along the laser line, which guarantees precise detection of even the smallest structures. This enables high-precision inspection applications with high repeatability, which is ideal for the inspection of ball grid arrays (BGAs), among other things. The innovative clean beam function protects the laser from external interference and ensures a uniform intensity distribution, which further increases reliability. The sensor's dual-head option eliminates occlusions and achieves profile speeds of up to 140 kHz with the 3070-WARP version, speeding up data analysis and increasing efficiency.

- **Unique 3D scan results without occlusion due to dual-head option and extremely high resolution**
- **High precision and repeatability thanks to high-quality laser line projection**
- **Two different sensor resolutions available (3070, 4090)**
- **Unrivaled optical resolution for electronic inspection (e.g. BGA inspection) with a field of view of up to 53 mm**
- **Highest inspection speed available with 3070 WARP sensor**

 [Visit our Website](#)

 [Contact us](#)

 [Visit our Product Documentation](#)

AT - Automation Technology GmbH
Hermann-Bössow-Straße 6-8
23843 Bad Oldesloe

AT - Automation Technology, Inc.
380 Main Street, Suite 203
Stoneham, MA 02180

www.at-sensors.com
support@automationtechnology.de
+49 (0)4531 / 88011-42

Model Information

Model Name	C6-S7-3070-XCS-50-24-85-SX-1G-405-3R
Part Number	602346099
Sensor configuration	Single

Detector/Performance specifications

Detector	CMOS Global Shutter
Resolution	3072 x 1020 pixels
Physical size	20.275 x 6.732 mm
Pixel size	6.6 x 6.6 μm
Points per profile	3072
Profile speed at 200 rows	4798.0 Hz
Maximum profile speed	66489.0 Hz
Linearity Z-Axis	0.018 % of calibrated Z-Range

X Field of View

	Nominal	Near Field	Far Field
Scan Width	23.9 mm	23.1 mm	24.6 mm
X-Resolution	7.8 μm	7.5 μm	8.0 μm
Z-Resolution	0.2 μm	-	-

Z Field of View

	Full	Near Field	Far Field
Z-Range	6.0 mm	3.0 mm	3.0 mm

Laser/Geometry specifications

Working Distance	84.5 mm
Triangulation Angle	50.0 °
Laser Safety Class	3R
Laser Wavelength	405.0 nm
Laser Output Power	80.0 mW
Laser Line Width	18.0 μm

Interface specifications

Ethernet	Gigabit-Ethernet 1.000 Mbit/s
Encoder	A, B, Z RS-422 TTL
Digital inputs	2x isolated digital inputs 5V - 24V DC
Digital outputs	2x isolated digital outputs 5V - 24V DC

 Visit our Website

 Contact us

 Visit our Product Documentation

AT - Automation Technology GmbH
Hermann-Bössow-Straße 6-8
23843 Bad Oldesloe

AT - Automation Technology, Inc.
380 Main Street, Suite 203
Stoneham, MA 02180

www.at-sensors.com
support@automationtechnology.de
+49 (0)4531 / 88011-42

Electrical/Mechanical specifications

Sensor power supply	12V - 24V DC 27V DC Max.
Power consumption	12 W
Laser power supply	12V - 24V DC
Connectors	Power&I/O: M12-Connector 17-pin A-coded Ethernet: M12-Connector 8-pin A-coded
Housing material	Anodized aluminium
Dimensions (L x W x H)	200.0 x 60.0 x 128.1 mm
Weight	1250.0 g

Environmental conditions


Temperatures	Operating: 0 °C - +40 °C Storage: -20 °C - +80 °C
Humidity	20 % - 80 % (non-condensing)
Vibration resistance	Sinusoidal: DIN EN 60068-2-6:2008-10: 2 g 10 Hz - 150 Hz Random: DIN EN 60068-2-64:2020-09: 7 g 10 Hz - 500 Hz
Shock resistance	DIN EN 60068-2-27: 2010-02: 15 g 3 ms
Protection class	IP67 According to IEC 60529

Software/Features

Supported standards	GenlCam GigEVision
Firmware features	RegionTracking RegionSearch MultiRegion MultiPart AutoStart HistoryBuffer MultiSlope MultiPeak
Software	SolutionPackage MetrologyPackage cxSDK with wrappers for C, C++, Python and Matlab


Connector layout and pin assignment

Power & I/O Connector: M12 17-Pin A-Coded Male



1	Z-	Encoder input Z- (RS-422)
2	AOUT	Analog output (0-5 V)
3	Z+	Encoder input Z+ (RS-422)
4	B+	Encoder input B+ (RS-422)
5	GND	Sensor supply ground, reference for AOUT
6	B-	Encoder input B- (RS-422)
7	A-	Encoder input A- (RS-422)
8	VCC	Sensor supply voltage (12-24 V DC)
9	GND	Sensor supply ground, reference for AOUT
10	A+	Encoder input A+ (RS-422)
11	ENC_GND	Encoder reference ground
12	OUT2	Digital output 2, level defined by OUT-VCC
13	IN1	Digital input 1 (5-24V DC)
14	IN2	Digital input 2 (5-24V DC)
15	OUT_Supply	Optional output supply voltage (5-24V DC), refers to IO-GND
16	OUT1	Digital output 1, level defined by OUT-VCC
17	IO_GND	Reference ground for digital inputs and outputs
Shield	SHIELD	Connected to device housing

Ethernet Connector: M12 8-Pin A-Coded Female



1	BI_DC-
2	BI_DD+
3	BI_DD-
4	BI_DA-
5	BI_DB+
6	BI_DA+
7	BI_DC+
8	BI_DB-
Shield	SHIELD

[Visit our Website](#)
[Contact us](#)
[Visit our Product Documentation](#)

AT - Automation Technology GmbH
Hermann-Bössow-Straße 6-8
23843 Bad Oldesloe

AT - Automation Technology, Inc.
380 Main Street, Suite 203
Stoneham, MA 02180

www.at-sensors.com
support@automationtechnology.de
+49 (0)4531 / 88011-42